


Battery Series B-RAD Select

The battery torque wrench B-RAD Select can be set digitally by values of 10Nm. The tool is also available with a two-stage automatic and ideally suited for most applications. Its advantages are the slim and short design and in its ease of use. Due to the brushless electric motor, the lifetime of the tool is increased. Furthermore these tools can be used for valve actuations.



- Digital torque setting by the value of 10 Nm
- Torque range 50-7.000 Nm
- Repeatability of $\pm 4,0$ %
- Brushless electric motor
- Automatic load release
- Slim and short design
- 360°-rotatable handle

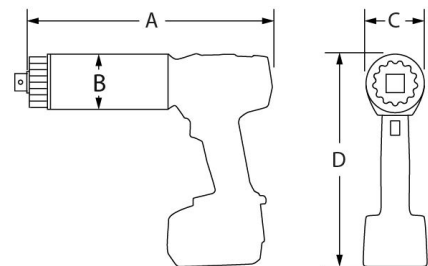

Type	Drive size	Torque [Nm]		RPM [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
B-RAD 275 Select	1/2" & 3/4"	50	270	47	3,2*	216	63	67	262
B-RAD 700 Select	3/4"	150	700	21	3,5*	231	63	67	262
B-RAD 1400 Select	3/4"	300	1.400	10	3,5*	231	63	67	262
B-RAD 1400-2 Select	3/4"	540	1.400	71	4,3*	279	63	67	262
B-RAD 2000 Select	1"	400	2.000	6	4,0*	244	69	69	262
B-RAD 2000-2 Select	1"	400	2.000	19	4,9*	298	69	69	262
B-RAD 3400 Select	1"	800	3.400	3	6,0**	285	81	81	268
B-RAD 4000 Select	1"	800	4.000	3	6,0**	285	81	81	268
B-RAD 4000-2 Select	1"	800	4.000	19	6,7**	337	81	81	268
B-RAD 7000 Select	1 1/2"	1.350	7.000	2	8,8**	295	95	95	275

OPTIONS

- Screw position lighting
- Lithium-HD battery with 8,0 Ah
- Modification on series MB-RAD as (M)B-RAD Offset

ACCESSORIES

Tool handle



Tool hanger



Offset gearbox




Special reaction arm



Double safety trigger



Nose extension

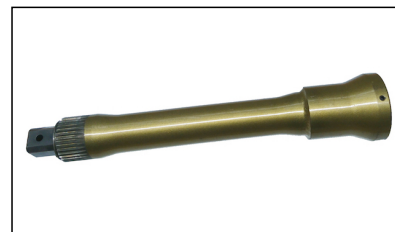

SCOPE OF DELIVERY

- Battery operated torque wrench B-RAD Select
- Reaction arm with two retaining rings
- Two Lithium-ion batteries with 5,2 Ah / 18 V
- Battery charger
- Calibration certificate
- Operation manual
- Tool case