


## Electric High Speed Series MED A/-2

The electric high speed series MED A/-2 incorporate a precision engineered high speed gearbox with two speeds. Faster run down and quick reaction point positioning on time is succeed. A very important safety feature is the controlled loosening at counterclockwise rotation. Gearbox damages are reduced thereby. Our MED A/-2 is especially suitable for maintenance work.



- Torque/angle controlled shut-off
- Repeatability  $\pm 3,0\%$
- Rapid bolting by precision mechanical, high-speed gearbox
- Torque Check Function for maintenance optional
- Multi-user level password protection
- Digital setpoint adjustment for high torque accuracy
- Torque control in anticlockwise rotation reduces transmission damages
- Intelligent counter for life cycle and maintenance

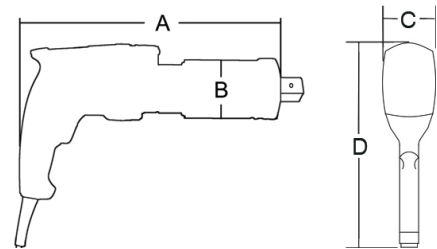

Type	Drive size	Torque [Nm]		RPM [min <sup>-1</sup> ]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
MED 14A	3/4"	400	1.400	36	5,4	485	63	73	209
MED 31A	1"	500	3.100	30	7,8	510	77	77	216
MED 31-2*	1"	310	3.100	11	6,7	465	77	77	216
MED 45-2*	1" & 1 1/2"	450	4.500	6	8,8	495	86	86	221
MED 70-2*	1 1/2"	700	7.000	4	9,5	429	96	96	226
MED 80-2*	1 1/2"	800	8.000	4	11,3	492	101	101	228
MED 110-2*	1 1/2"	2.100	11.000	3	13,1	510	108	108	232

\* Gradual adjustment using the torque table. Rotation angle control not possible.

## OPTIONS

---

- Torque Check Function (only at -2)
- Documentation System (only at A)
- Version as a 120 V machine
- ProTight™ worker guidance system (only at A)
- BoltPilot® (only at A)

## ACCESSORIES

---

Tool handle



Barcode scanner



Offset gearbox



Special reaction arm



Double safety trigger



Nose extension



## SCOPE OF DELIVERY

---

- Electric torque wrench MED A/-2
- Reaction arm with two retaining rings
- Torque table (only at -2)
- Calibration certificate
- Operation manual
- Tool case