


Pneumatic Series SL/GX/DX

The pneumatic series SL/GX/DX offer the best power-to-weight ratio. The torque can be set by a finely graded pressure control valve. By continuous, even torque increase the torque will be induced ideal to the bolted assembly. Noise, vibration and thread damage, as appear to conventional impact wrenches, are prevented.

- Torque controlled shut-off
- Repeatability $\pm 5,0\%$
- Torque setting by a finely graded pressure control valve
- Very robust, fast and safe
- Low noise and vibration
- Best power-to-weight ratio
- Portable FRL unit included
- Available with ATEX certification

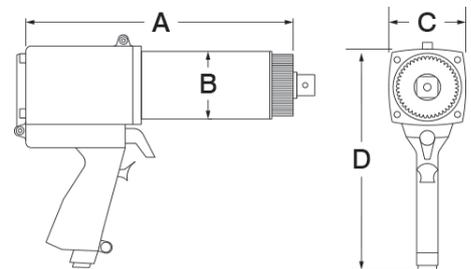


Type	Drive size	Torque [Nm]		RPM [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
100 SL	1/2" & 3/4"	35	100	275	2,6	161	63	70	206
275 SL	3/4"	50	275	90	2,9	173	63	70	206
475 SL	3/4"	70	475	65	2,9	173	63	70	206
10 GX	3/4"	150	950	30	3,5	209	63	70	206
14 GX	3/4"	275	1.350	20	3,5	209	63	70	206
20 DX	1"	400	2.000	10	3,9	205	69	70	206
34 GX	1"	700	3.400	9	6,1	246	77	84	242
40 DX	1" & 1 1/2"	1.200	4.000	8	6,6	261	81	84	242
46 GX	1" & 1 1/2"	1.400	4.600	12	9,0	325	86	96	266
70 DX	1 1/2"	2.000	7.000	8	10,7	294	95	96	269
80 DX	1 1/2"	2.700	8.000	7	12,5	348	101	101	269
110 DX	1 1/2"	3.400	10.800	4	13,9	318	108	108	273
150 DX	1 1/2" & 2 1/2"	5.400	15.000	3	19,0	361	127	127	281

OPTIONS

- ATEX-certification on screwing device and maintenance unit
- Maintenance unit with two fixed pressure settings
- Pneumatic torque wrench with integrated torque sensor
- Other tubing lengths on request

ACCESSORIES

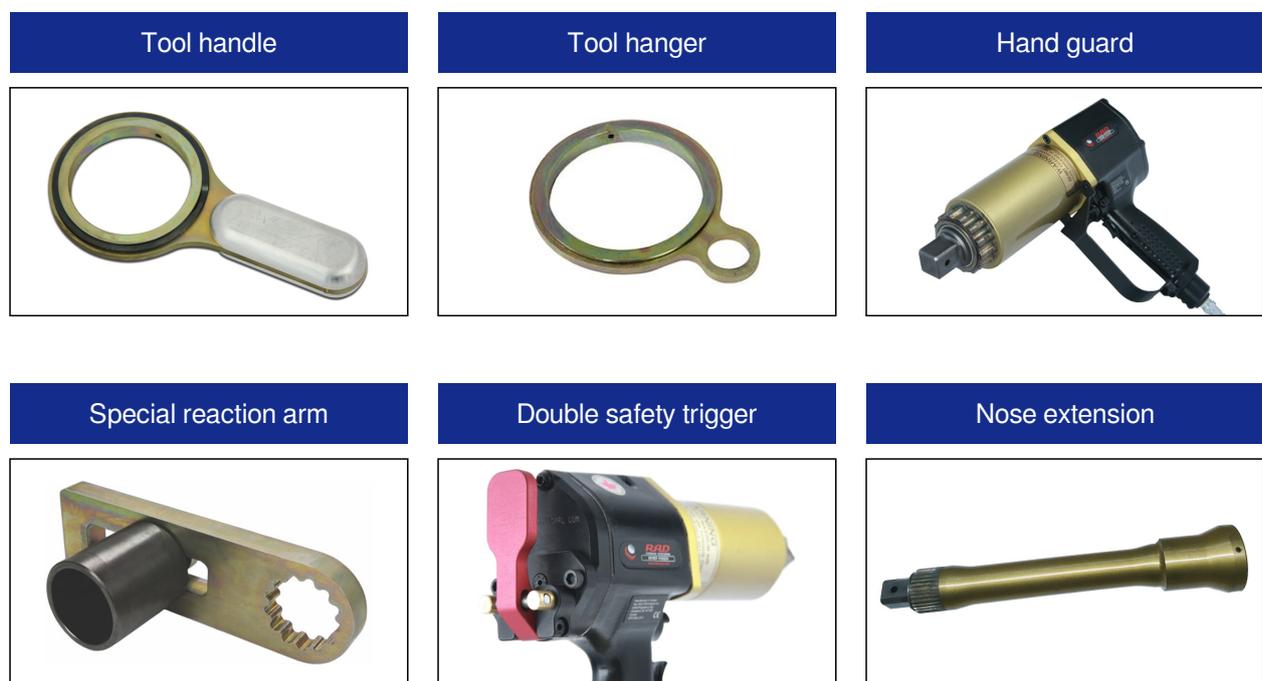

SCOPE OF DELIVERY

- Torque Wrench SL/GX/DX
- Reaction arm with two retaining rings
- Maintenance unit incl. compressed air oil
- Compressed air tube 3,6 m
- Calibration certificate
- Operation manual
- Foldable transport case