


Pneumatic High Speed Series SL/GX/DX-2

The high speed series SL/GX/DX-2 incorporate a precision engineered high speed gearbox designed for faster run down and quick reaction point positioning on time sensitive bolting applications. The two-speed models feature a unique full automatic gearbox design, eliminating the time consuming switch between high and low speed gear.

- Torque controlled shut-off
- Repeatability $\pm 5,0\%$
- Rapid bolting by precision mechanical, high-speed gearbox
- Torque setting by a finely graded pressure control valve
- Very robust, fast and safe
- Low noise and vibration
- Good power-to-weight ratio
- Portable FRL unit included
- Available with ATEX certification

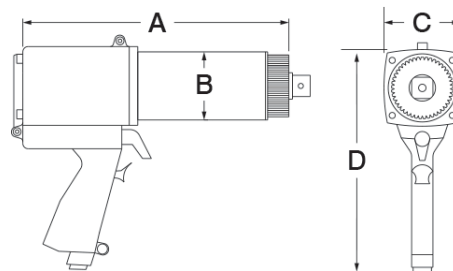


Type	Drive size	Torque [Nm]		RPM [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
475 SL-2	3/4"	150	475	300	4,0	234	63	70	206
750 SL-2	3/4"	275	680	170	4,0	241	63	70	206
14 GX-2	3/4"	450	1.350	85	4,5	261	63	70	206
20 DX-2	1"	700	2.000	50	4,8	250	69	70	206
34 GX-2	1"	950	3.400	44	7,6	305	77	84	242
40 DX-2	1" & 1 1/2"	1.600	4.000	45	7,4	309	81	84	242

OPTIONS

- ATEX-certification on screwing device and maintenance unit
- Maintenance unit with two fixed pressure settings
- Other tubing lengths on request

ACCESSORIES

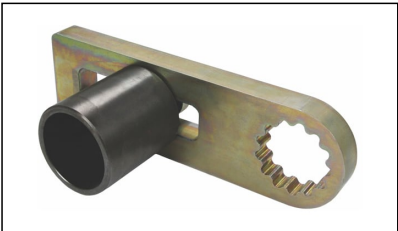Tool handle	Tool hanger	Hand guard
		
Special reaction arm	Double safety trigger	Nose extension
		

SCOPE OF DELIVERY

- Torque Wrench SL/GX/DX-2
- Reaction arm with two retaining rings
- Maintenance unit incl. compressed air oil
- Compressed air tube 3,6 m
- Calibration certificate
- Operation manual
- Foldable transport case