


Pneumatic Wheel Nut Series GX/DX-R, -NR

The wheel nut bolting series were designed for wheel nut bolting where torque control is a must. Our planetary gear torque wrenches are vibration free and have the accuracy to prevent accidentally under – and over tightening. The fixed nose extensions are ideal for reaching wheel nut studs that are recessed and where tool clearance is a problem.

- Torque controlled shut-off
- Repeatability $\pm 5,0\%$
- Fixed nose extension with custom reaction arm
- Torque setting by a finely graded pressure control valve
- Very robust, fast and safe
- Low noise and vibration
- Good power-to-weight ratio
- Portable FRL unit included
- Available with ATEX certification

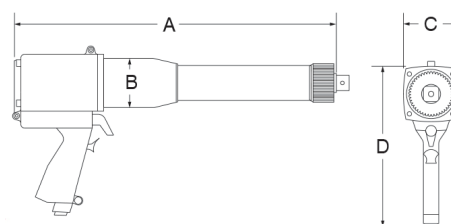

Type	Drive size	Torque [Nm]		RPM [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
10 GX-2-R	3/4"	400	950	115	5,4	368	63	70	206
14 GX-R	3/4"	275	1.350	20	3,6	228	63	70	206
20 DX-R	1"	400	2.000	10	3,9	203	69	70	206
20 DX-NR	1"	400	2.000	10	7,3	542	69	70	206
24 GX-NR	1"	700	2.450	10	12,4	546	76	76	206

OPTIONS

- ATEX-certification on screwing device and maintenance unit
- Maintenance unit with two fixed pressure settings
- Other tubing lengths on request

ACCESSORIES

Tool handle	Tool hanger	Hand guard
		
Special reaction arm	Double safety trigger	Nose extension
		

SCOPE OF DELIVERY

- Wheel bolt wrench GX/DX-R, -NR
- Reaction arm with two retaining rings
- Maintenance unit incl. compressed air oil
- Compressed air tube 3,6 m
- Calibration certificate
- Operation manual
- Foldable transport case