


Square Drive Series With Fine Toothing IBT-F

The lightweight alloy gives the IBT-F ultimate power with the smallest total weight. The standard square drive will fit customary sockets or other attachments. The fine toothing of the tool prevents jamming.

- High resistance with aluminium-titanium and light body
- 700 bar maximum operation pressure
- Repeatability of $\pm 3,0 \%$
- 360° adjustable reaction arm with safety lock feature
- 360° x 180° multi-positional swivel quick release couplings
- Suitable for continuous operation at maximum pressure
- Higher torques available on request
- Pressure relief valve prevents over pressure

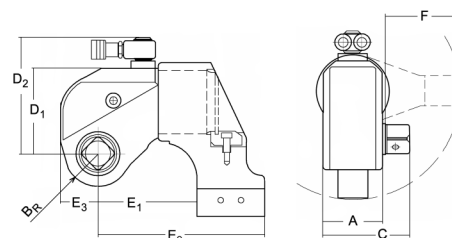

Type	Drive size	Torque [Nm]		Weight [kg]	Dimensions [mm]								
		min.	max.		A	B _R	C	D ₁	D ₂	E ₁	E ₂	E ₃	F
1 IBT-F	3/4"	170	1.700	1,9	51	25	73	65	106	85	140	27	67
3 IBT-F	1"	450	4.500	4,8	68	34	98	87	136	114	189	29	91
8 IBT-F	1½"	1.000	10.000	9,0	92	46	135	117	165	153	241	52	119
10 IBT-F	1½"	1.500	15.000	14,8	100	50	141	127	175	154	259	64	130
25 IBT-F	2½"	3.700	37.000	32,4	137	66	200	174	222	199	334	98	162

OPTIONS

- Higher torques on request
- Personalized engraving on the housing (for example: company logo)

ACCESSORIES



SCOPE OF DELIVERY

- Hydraulic square torque wrench IBT-F
- Interchangeable square drive
- Torque table
- Calibration certificate
- Operation manual
- Tool case (to type 10 IBT-F)