


Low Profile Series MFC

The MFC series hydraulic torque wrench is compact, flat and slim. The design makes it perfect for height-restricted applications. The torsion retaining pawl system achieves maximum efficiency as bolt torsion is restricted with each stroke, optimising direct preload force transmission.

- High resistance with aluminium-titanium and light body
- 700 bar maximum operation pressure
- Repeatability of $\pm 3,0\%$
- Torsion retaining ratchet system
- $360^\circ \times 180^\circ$ multi-positional swivel quick release couplings
- Interchangeable cassettes with small head radius
- Suitable for continuous operation at maximum pressure
- Pressure relief valve prevents over pressure

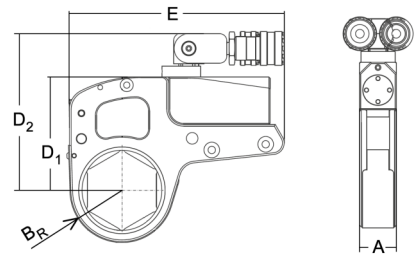


Type	Wrench size [mm]	Torque [Nm]		Weight [kg]	Dimensions [mm]				
		min.	max.		A	B _R	D ₁	D ₂	E
2 MFC	19 - 60	225	2.350	2,4	32	27-46	95	132	186
4 MFC	34 - 80	520	5.750	5,7	43	36-61	127	176	251
8 MFC	41 - 105	1.050	11.000	9,6	53	46-78	154	211	308
14 MFC	50 - 115	1.850	18.500	17,8	64	60-87	200	252	378
30 MFC	85 - 175	4.190	44.600	31,0	85	77-128	253	300	460
60 MFC	145 - 230	9.250	101.600	108,0	120	123-173	338	380	590

OPTIONS

- Higher torques on request
- Personalized engraving on the housing (for example: company logo)

ACCESSORIES


Screw coupling

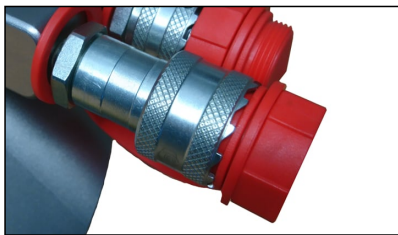

Damper support



Support extension

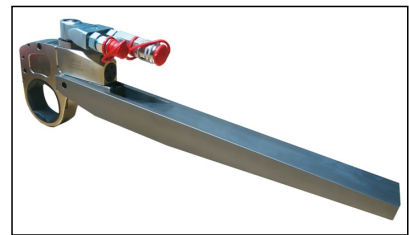

SCOPE OF DELIVERY

- Hydraulic torque wrench MFC
- Interchangeable cassette
- Torque table
- Calibration certificate
- Operation manual
- Tool case (to type 14 MFC)