


Low Profile Series With Fine Toothing LOW-F

The hydraulic torque wrench series LOW-F is compact, flat and slim. The design makes it perfect for height-restricted applications. The fine toothing of the tool prevents jamming.

- High resistance and long life with aluminum-titanium body
- Repeatability $\pm 3,0\%$
- Max. working pressure 700 bar
- Fine toothing prevents jamming
- Built in pressure relief valve prevents overpressure
- All standard cassettes are resistant at maximum torque
- Interchangeable cassettes with small head radius
- 360° x 185° multi-positional connection port with quick or screw couplings
- Suitable for continuous operation at maximum pressure




Type	Wrench size [mm]	Torque [Nm]		Weight [kg]	Dimensions [mm]					
		min.	max.		A	B _R	C	D ₁	D ₂	E
2 LOW-F	19 - 46	260	2.600	3,0	32	26-37	51	97	125	193
2 LOW-F	50 - 60	300	3.000	3,1	32	40-46	51	97	125	193
4 LOW-F	27 - 65	540	5.400	6,7	41	36-53	64	125	158	250
4 LOW-F	70 - 80	600	6.000	6,9	41	56-61	64	125	158	250
8 LOW-F	50 - 80	1.180	11.800	11,8	52	44-63	78	157	189	310
8 LOW-F	85 - 105	1.450	14.500	12,2	52	66-77	78	157	189	310
14 LOW-F	70 - 100	2.120	21.200	18,4	64	59-77	93	191	223	378
14 LOW-F	105 - 115	2.310	23.100	18,4	64	80-87	93	191	223	378
30 LOW-F	80 - 115	4.380	43.800	45,0	83	72-95	97	242	291	405
30 LOW-F	120 - 175	4.850	48.500	46,0	83	95-128	97	242	291	425

OPTIONS

- Higher torques on request
- Personalized engraving on the housing (for example: company logo)

ACCESSORIES


Screw coupling

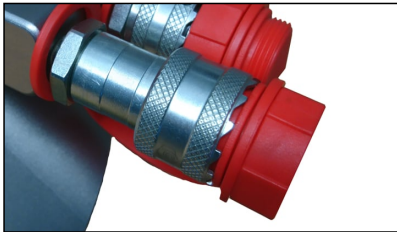

Damper support



Support extension

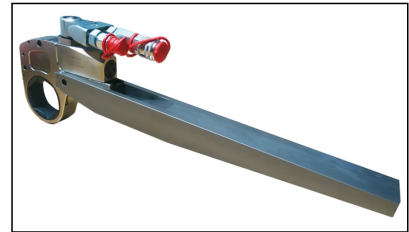

SCOPE OF DELIVERY

- Hydraulic torque wrench LOW-F
- Interchangeable cassette
- Torque table
- Calibration certificate
- Operation manual
- Tool case (to type 14 LOW-F)