


Manual Torque Wrenches Series 7455

The manual torque wrench series 7455 has a fixed ratchet and is adjustable in a torque range of 1-1.500 Nm. The sizes 5-25 Nm have a double scale with the units Nm/ft.lb and Nm/lb.in. An audible and tactile clicking signals the reached torque. Due to the non-slipping metal handle the manual torque wrench rests comfortably in the hand and ensures easy and safe tightening as well as loosening of bolted connections.



- Manual torque wrench with fixed ratchet
- Torque range 1-1.500 Nm
- Scale accuracy $\pm 4,0\%$
- Double scale in Nm/ft.lb and Nm/lb.in (sizes 5-25 Nm)
- Clockwise and anti-clockwise tightening
- Audible and tactile signal when torque is reached
- Quick release safety lock for 1/4" & 1/2"
- Non-slipping metal handle

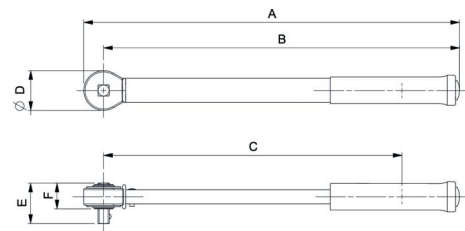

Type	Drive size	Torque [Nm]		Weight [kg]	Dimensions [mm]					
		min.	max.		A	B	C	D	E	F
7455-5	1/4"	1	5	0,386	258	245	200	27	24	16
7455-15	1/4"	3	15	0,409	258	245	200	27	24	16
7455-20	1/4"	4	20	0,386	258	245	200	27	24	19
7455-25	1/4"	5	25	0,41	286	273	226	27	24	16
7455-60	3/8"	10	60	1,135	393	376	326	34	30	20
7455-100	3/8"	20	100	1,135	400	383	333	34	30	20
7455-200	1/2"	40	200	1,43	474	455	405	43	41	26
7455-300	1/2"	60	300	1,44	483	465	415	43	41	26
7455-340	1/2"	60	340	1,68	613	595	545	43	41	26
7455-500	3/4"	100	500	4,37	870	830	780	65	53	29
7455-800	3/4"	150	800	5,31	1.947	1.015	970	65	53	29
7455-1000	1"	200	1.000	6,350	1.055	1.010	970	78	68	38
7455-100A	1/2"	20	100	1,29	414	395	345	43	41	26
7455-1500	1"	300	1.500	11,395	1.780	1.740	1.690	78	68	38

ACCESSORIES

Socket wrench set



Square reduction



SCOPE OF DELIVERY

- Manual torque wrench 7455
- Calibration certificate
- Operation manual
- Plastic pipe (up to size 340 Nm) or tool case (from size 500 Nm)