


Electric Pump HEM 15 / HEM 20 for Tensioners

The electric power pump series HEM 15 / HEM 20 works fast and reliable in two stages. The pressure can be set at the pressure gauge continuously. Due to the integrated oil cooler the pump can operate permanently. Furthermore the pump design 120 V enable the worldwide operation of this series. This hydraulic pump is suitable for hydraulic torque tensioners.



- Two-stage hydraulic pump with electric drive for hydraulic torque tensioners
- Continuous pressure setting
- Precision pressure gauge (1.500 bar or. 2.000 bar - class 1,0)
- Incl. oil cooler
- Handle und protection bracket made of steel
- For mains voltage 230 V, 50 Hz

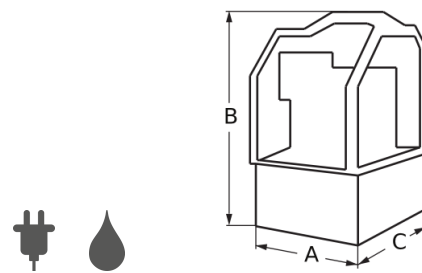

Type	Flow rate [l/min]	Pressure [bar]	Power [kW]	Volume [l]	Weight [kg]	Dimensions [mm]		
						A	B	C
HEM 15-110-3	High pressure: 0,3 Low pressure: 4,2	1.500	1,1	3	28,3	300	450	430
HEM 20-110-3	High pressure: 0,3 Low pressure: 4,2	2.000	1,1	3	28,3	300	450	430

OPTIONS

- Execution with pressure 3.000 bar
- Execution with pneumatic drive
- Other cable lengths possible on request

ACCESSORIES

SCOPE OF DELIVERY

- Hydraulic pump with oil filling
- Operation manual