


Battery Series B-RAD Select-L

The battery torque wrench series B-RAD Select-L prevents a non-ergonomic posture: with its fixed extension, all deep bolts can be tightened and loosened in an upright posture. This battery tool is available in single and automatic 2-speed gearbox, making it suitable for many industries. The electric motor is brushless, increasing thereby the tool's lifetime.



- Torque controlled shut-off
- Repeatability of $\pm 4,0\%$
- Digital torque setting by the value of 10 Nm
- Extension prevents non-ergonomic posture
- Brushless electric motor
- Automatic load release

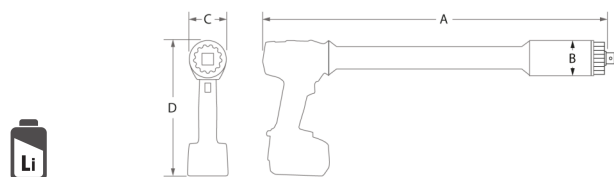

Type	Drive size	Torque [Nm]		RPM [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
B-RAD 700 Select-L	3/4"	150	700	21	5,3*	800	63	68	245
B-RAD 700-2 Select-L	3/4"	150	700	83	6,5*	860	63	68	245
B-RAD 1400 Select-L	3/4"	300	1.400	10	5,9*	810	63	68	245
B-RAD 1400-2 Select-L	3/4"	300	1.400	71	6,5*	860	63	68	245

OPTIONS

- Screw position lighting
- Lithium-HD battery with 8,0 Ah
- Modification on series MB-RAD

ACCESSORIES

Special reaction arm



Double safety trigger



Offset gearbox



SCOPE OF DELIVERY

- Battery operated torque wrench B-RAD Select-L
- Reaction arm with two retaining rings
- Two Lithium-ion batteries with 5,2 Ah / 18 V
- Battery charger
- Calibration certificate
- Operation manual
- Tool case